



V501, EDITION 3
 Prepared by the U.S. Army Topographic Command (AJEE), Washington, D.C. Compiled in 1954 by photogrammetric methods from aerial photographs taken 1952, and from USCG&S charts 1940-52. Photographs filed annotated 1953. Revised by the U.S. Geological Survey 1970.

Selected hydrographic data compiled from USCG&S charts 1940-52. This information is not intended for navigational purposes. Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES

Over 500,000
 100,000 to 500,000
 25,000 to 100,000
 5,000 to 25,000
 1,000 to 5,000
 Less than 1,000

ROADS

Primary, all-weather, hard surface
 Secondary, all-weather, hard surface
 Light-duty, all-weather, hard or improved surface
 Fair or dry weather, unimproved surface
 Trail
 Interchange

RAILROADS


Single track, double or multiple
 Standard gauge
 Narrow gauge
 Landplane airport
 Landing area
 Shipplane airport
 Sloopplane anchorage
 Power line
 Spot elevation in feet

BOUNDARIES

International
 State
 County, parish
 Mine
 Park or reservation
 Woods-brushwood
 Marsh or swamp

Other symbols:

Route markers: Interstate, U.S., State
 Landmarks: School, Church, Other
 Depth curve in feet
 Limit of danger: Reef
 Rocks: Awash
 Foreshoar flat
 Intermittent or dry stream

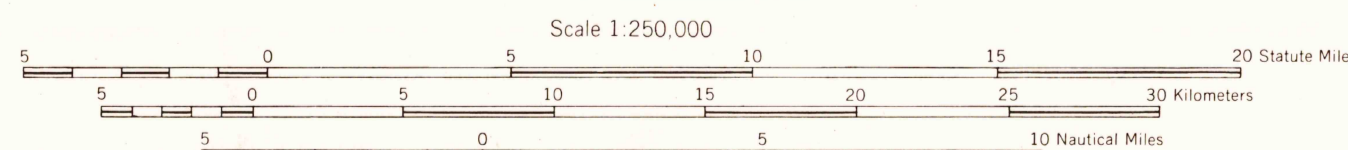


Scale 1:250,000
 20 Statute Miles
 10 Nautical Miles

CONTOUR INTERVAL 50 FEET
 WITH SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS
 TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 16
 1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 9° (60 MILES) WESTERLY FOR THE CENTER OF THE WEST EDGE TO 35° (60 MILES) EASTERLY FOR THE CENTER OF THE EAST EDGE

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR WASHINGTON, D.C. 20242

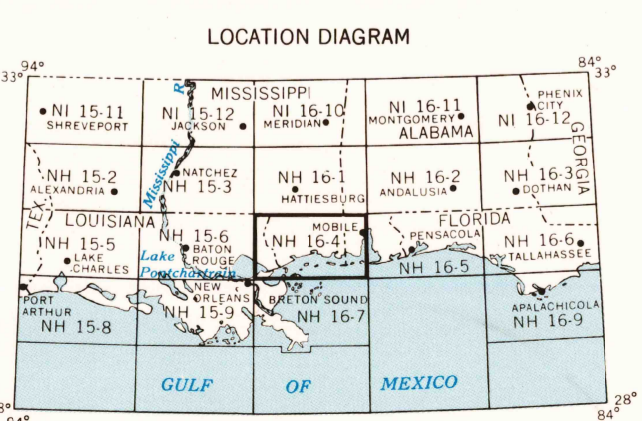

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

GRID ZONE DESIGNATION
 16R

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

SAMPLE POINT: SEANAMAN

BK	CK	DK
BJ	CJ	DJ
30	40	

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS

1. Read letters identifying 100,000 meter square in which the point lies.
 2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line within the top or bottom margin, or on the line itself.
 3. Estimate tenths from grid line to point and read LARGE figure labeling the line within the top or bottom margin, or on the line itself.
 4. Estimate tenths from grid line to point.

SAMPLE REFERENCE:
 If reporting beyond 10' in any direction, prefix Grid Zone Designation, etc.

16R030
 16R030

USGS
 Historical File
 Topographic Division

MOBILE, ALA.; MISS.; LA.
 1953
 REVISED 1970

STOCK NO. V501.XNH164-03

APR 20 1973