



V502, EDITION 3
 Prepared by the U.S. Army Topographic Command (KC), Washington, D.C. Compiled in 1962 from United States quadrangles, 1:20,000, 1:25,000, 1:50,000, and 1:62,500, 1930-57; USCGS charts, 1958; Planimetry revised from aerial photographs taken 1952-57. Map field checked 1963. Revised in 1972 by the U.S. Geological Survey from aerial photographs taken 1970.
 Selected hydrographic data compiled from USC&GS charts. This information is not meant for navigational purposes.
 100,000-foot grid based on Louisiana coordinate system, south zone. Location of geodetic control established by government agencies is shown on corresponding 1:250,000-scale Geodetic Control Diagram.

LEGEND

Figures in red denote approximate distances in miles between stars

POPULATED PLACES	ROADS	ROUTES
Over 500,000	Primary all-weather, hard surface	Primary: all-weather, hard surface
100,000 to 500,000	Secondary all-weather, hard surface	Secondary: all-weather, hard surface
25,000 to 100,000	Fair or dry weather, improved surface	Light-duty, all-weather, hard or improved surface
5,000 to 25,000	Fair or dry weather, unimproved surface	Fair or dry weather, unimproved surface
1,000 to 5,000	Trail	Trail
Less than 1,000	Interchange	Interchange
RAILROADS	Sun Valley	Sun Valley
Normal gauge	Route marker: Interstate, Federal, State, and County	Route marker: Interstate, Federal, State, and County
Narrow gauge	Landmark: School, Church, Other	Landmark: School, Church, Other
BOUNDARIES	Depth curve in feet	Depth curve in feet
International	Limit of danger: Reef	Limit of danger: Reef
State	Rocks: Awash	Rocks: Awash
Parish	Foreshore flat	Foreshore flat
State or reservation	Intermittent or dry stream	Intermittent or dry stream
Park or reservation	Marsh or swamp	Marsh or swamp
Spot elevation in feet	227: Woods/brushwood	227: Woods/brushwood

Scale 1:250,000

0 5 10 15 20 25 30 Statute Miles

0 5 10 15 20 25 30 Kilometers


0 5 10 15 Nautical Miles

CONTOUR INTERVAL 50 FEET
 WITH SUPPLEMENTARY CONTOURS AT 25 FOOT INTERVALS

TRANSVERSE MERCATOR PROJECTION

BLACK NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 15

1970 MAGNETIC DECLINATION FROM TRUE NORTH VARIES FROM 6° (10 MILES) EASTERLY FOR THE CENTER OF THE WEST EDGE TO 1° (50 MILES) EASTERLY FOR THE CENTER OF THE EAST EDGE

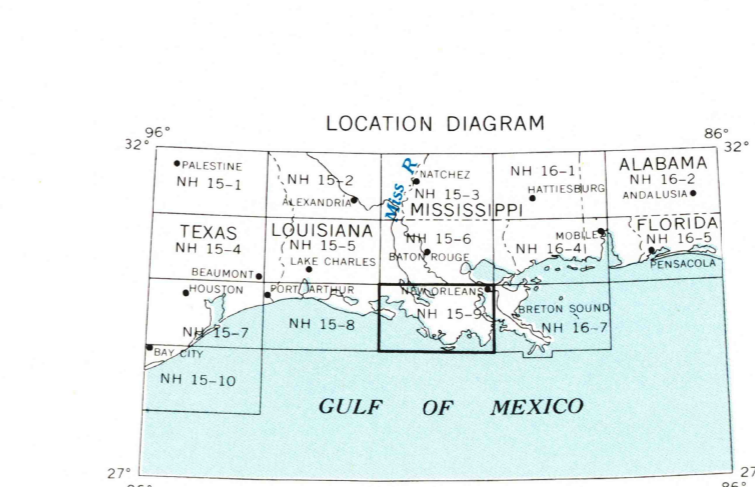

SECTIONIZED TOWNSHIP

6	5	4	3	2	1
7	8	9	10	11	12
13	14	15	16	17	18
19	20	21	22	23	24
25	26	27	28	29	30
31	32	33	34	35	36

USGS
 Historical File
 Topographic Division

GRID ZONE DESIGNATION: 15 R

TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1000 METERS

USGS
 Historical File
 Topographic Division

NEW ORLEANS, LOUISIANA
 1963
 REVISED 1972

STOCK NO. V502XNH159 ***03

MAR 2 1 1963

9575