



Produced by the United States Geological Survey
Topography compiled 1976. Planimetry derived from imagery taken 1998 and other sources. Public Land Survey System and survey control current as of 1982. Boundaries current as of 2001 North American Datum of 1983 (NAD 83). Projection and 1 000-meter grid: Universal Transverse Mercator, zone 15 10 000-foot ticks: Louisiana Coordinate System of 1983 (south zone) North American Datum of 1927 (NAD 27) is shown by dashed corner ticks. The values of the shift between NAD 83 and NAD 27 for 7.5-minute intersections are obtainable from National Geodetic Survey NADCON software.
Landmark buildings verified 1982

UTM GRID AND 2001 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET
23° 07' 00" N
7° 25' 00" W
44 MILES

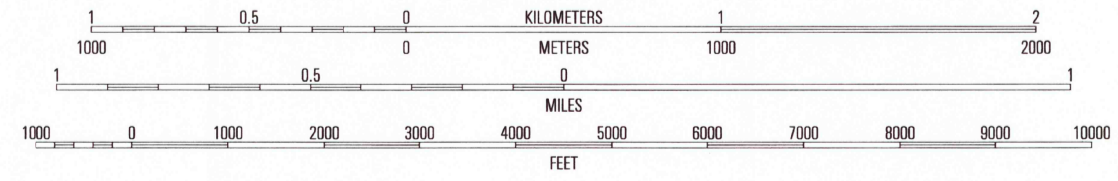

SCALE 1:24 000
CONTOUR INTERVAL 5 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929
TO CONVERT FROM FEET TO METERS, MULTIPLY BY 0.3048

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS
FOR SALE BY U.S. GEOLOGICAL SURVEY, P.O. BOX 25286, DENVER, COLORADO 80225
AND LOUISIANA DEPARTMENT OF TRANSPORTATION AND DEVELOPMENT, BATON ROUGE, LOUISIANA 70804
A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST



ROAD CLASSIFICATION
Primary highway (solid red line)
hard surface (dotted red line)
Secondary highway (dashed red line)
hard surface (dotted red line)
Light-duty road, hard or improved surface (solid black line)
Unimproved road (dashed black line)
Interstate Route (red shield)
U.S. Route (white shield with red border)
State Route (white shield with black border)

1	2	3
4	5	6
7	8	

RECEIVED
APR 30 2002

MIRE, LA
1998

USGS NW1U
HISTORICAL MAP ARCHIVES
NIMA 7544 I SW-SERIES V885

ISBN 0-607-94705-5
9 780607 947052